


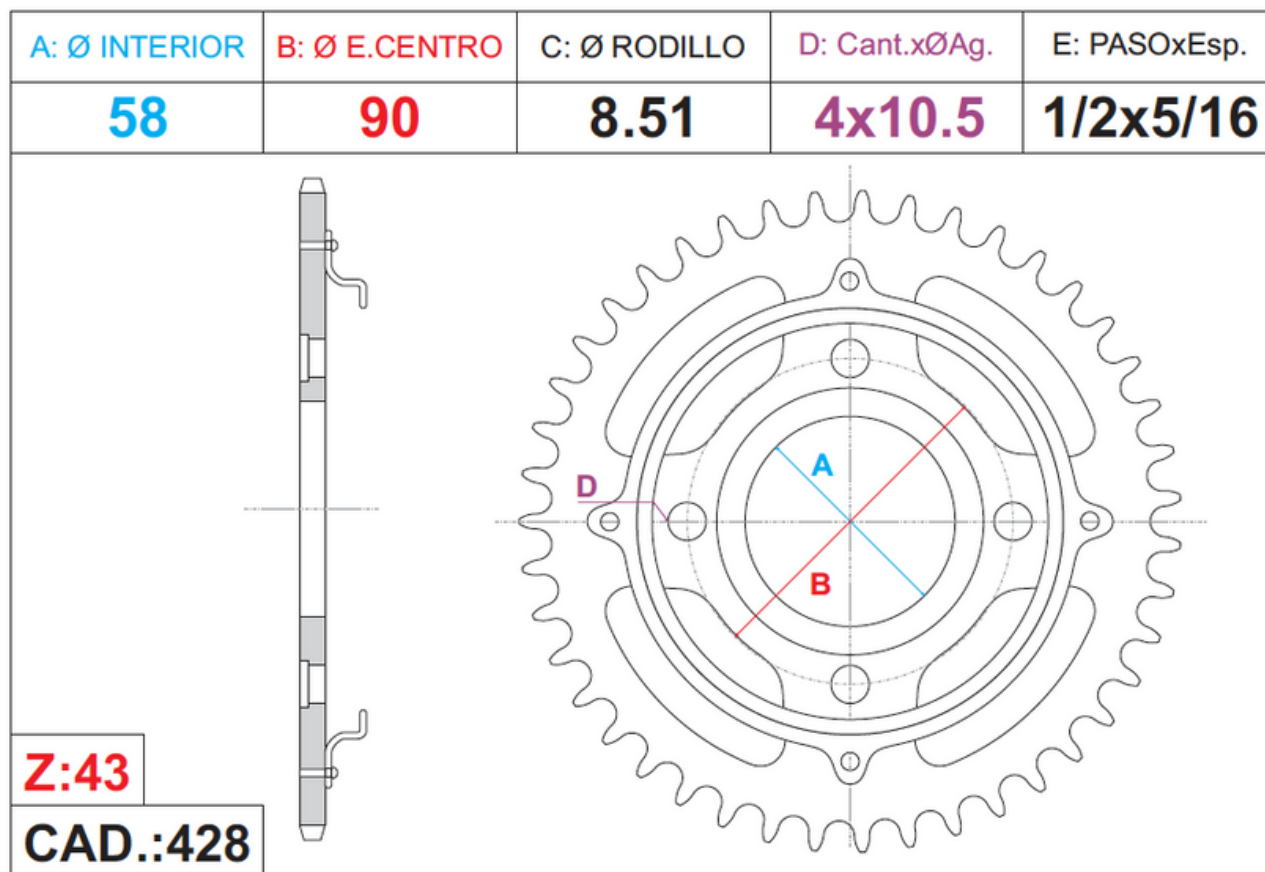

Units for A-B-C-D millimeters // for E inches.

PARAMETERS

Protection

YES - PROTECTIVE ANTIRUST OIL

Treatment


Hardening: YES

Quenching: YES

Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)

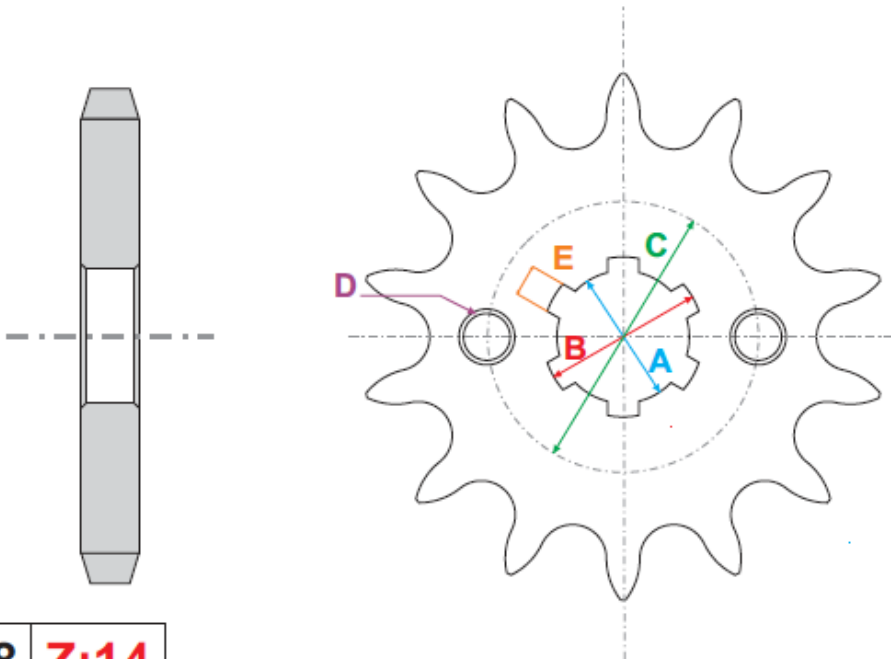A: Ø INT.	B: Ø EXT.	C: Ø EC.	P x E x Rod.	D: Cant.x Rosc.Ag.	E: N° EsT.xEsp.
17	20	34	1/2x5/16x8.51	2x(RM6x1)	6 x 4
					
CAD.:428		Z:14			

Units for A-B-C-E-Rod. millimeters
 Units for P-E- inches

PARAMETERS

Protection

YES - PROTECTIVE ANTIRUST OIL

Treatment

Hardening: YES

Quenching: YES

Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)