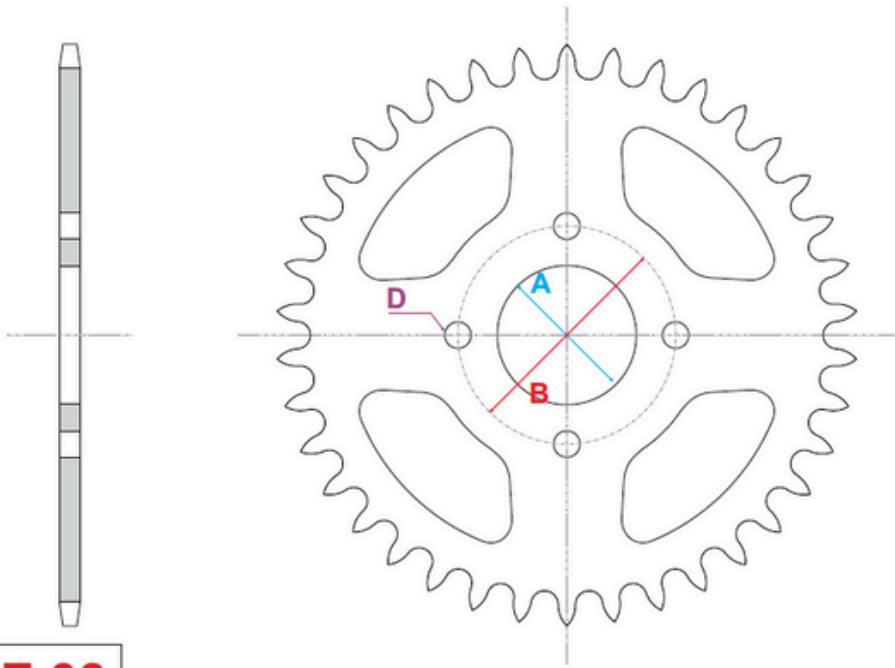


A: Ø INTERIOR	B: Ø E.CENTRO	C: Ø RODILLO	D: Cant.xØPIV.	E: PASOxEsp.
39.6	62	7.75	4x7.5	1/2x3/16
				
CAD.:415	Z:38			

Units for A-B-C-D milimeters // for E inches.

PARAMETERS

Protection

NO NEED

Treatment


Hardening: YES

Quenching: YES

Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)

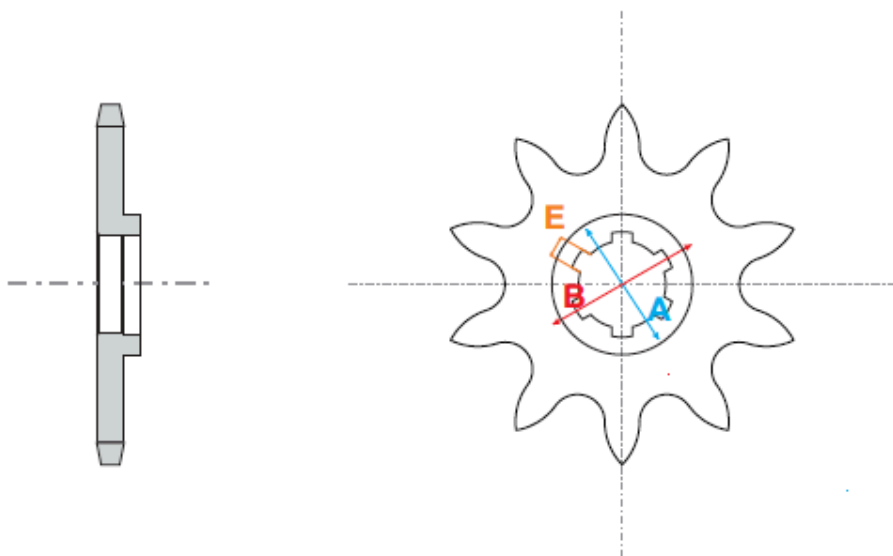A: Ø INT.	B: Ø EXT.	C: Ø EC.	P x E x Rod.	D: Cant.x Rosc.Ag.	E: N° EsT.xEsp.
13,1	15	N/A	1/2x3/16x7.75	N/A	6 X 3.5
					
CAD.:415		Z:10			

Units for A-B-C-E-Rod. millimeters
 Units for P-E- inches

PARAMETERS

Protection

NO NEED

Treatment

Hardening: YES

Quenching: YES

Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)